


Copper & CCAM conductor, PE insulated and PVC sheathed, communication cables

This cable is designed for using indoor and are used to transmit analog and digital signals in telephone and fax machines, fire alarm systems and other telecommunication equipment

Standard: ISIRI 463

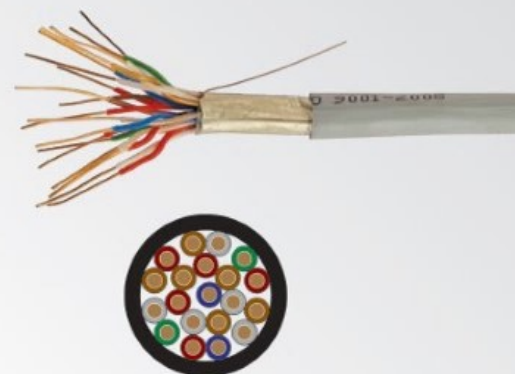

Conductor	Number & Nominal area (mm ²)	Insulation thickness (mm)	Sheath thickness (mm)	Approx. overall diameter (mm)	Approx. Weight (kg/km)	Standard length (m)
CU	2×2×0.6	0.2	0.6	3.5	22.5	500
	4×2×0.6	0.2	0.6	5.0	43.4	500
	6×2×0.6	0.2	0.6	5.7	59.5	500
	10×2×0.6	0.2	0.6	7.2	90.7	500
	20×2×0.6	0.2	0.6	10.1	175.0	500
CCAM	2×2×0.6	0.2	0.6	3.5	15.6	500
	4×2×0.6	0.2	0.6	5.0	28.1	500
	6×2×0.6	0.2	0.6	5.7	36.2	500
	10×2×0.6	0.2	0.6	7.2	52.8	500
	20×2×0.6	0.2	0.6	10.1	98.1	500